


Základné opracovanie pohybových skrutiek BK/BF a FK/FF

FF / BF

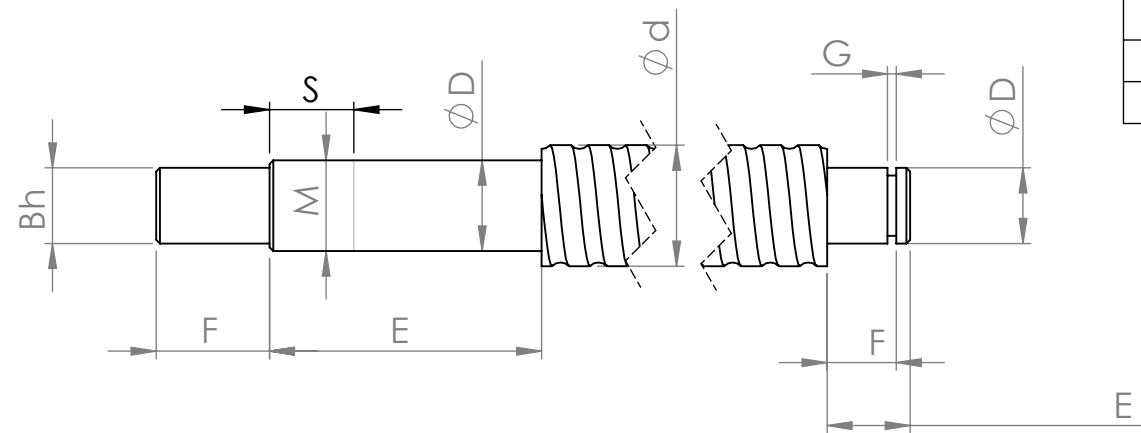

FF Size	BF Size	Shaft "d"	D	E	F	G
FF10	BF10	12	8	10	7.9	0.9
FF12	BF12	16	10	11	9.15	1.15
FF15	BF15	20	15	13	10.15	1.15
FF17	BF17	20	17	16	13.35	1.15
FF20	(BF20)	25	20	19 (16)	15.35 (13.35)	1.35
FF25	BF25	32	25	20	16.35	1.35
FF30	BF30	40	30	21	17.75	1.75

FK Size	BK Size	Shaft "d"	D	E	F	M	S	Bh
FK10	BK10	12	10	36	15	M10x1	16	8
FK12	BK12	16	12	36	15	M12x1	14	10
FK15	(BK15)	20	15	47 (40)	20	M15x1	12	12
FK17	(BK17)	20	17	58 (53)	23	M17x1	17	15
FF20	(BK20)	25	20	62 (53)	25	M20x1	15	17
FK25	(BK25)	32	25	76 (65)	30	M25x1,5	18	20
FK30	BK30	40	30	72	38	M30x1,5	25	25

MATERIAL	STOCK DIM	WEIGHT (g)	SURFACE TREAT.	NOTES
----------	-----------	------------	----------------	-------

	This documentation is the intellectual property of CNC PRISLUSENSTVO SK.
	Feel free to share it and visit our e-shop www.cncprislusenstvo.sk

	NAME	SIGN	DATE	Dimmensions are in mm Tolerances: ISO 8015 Accuracy: ISO 2768 mK
DRAWN				
CHECKED				
APPROVED				
PRODUCT NAME:				
DWG NAME:				

SCALE	1:1	SIZE	A3
DATE	1/2/2019		
DWG NO.	O-XU		
REVISION :			